

P8 SMD Outdoor Slim & Light Rental Cabinet






Ultra slim

- The widest portion is 89mm
- The thinnest portion is 72mm



Structure description—Module appearance

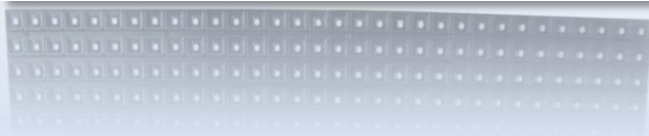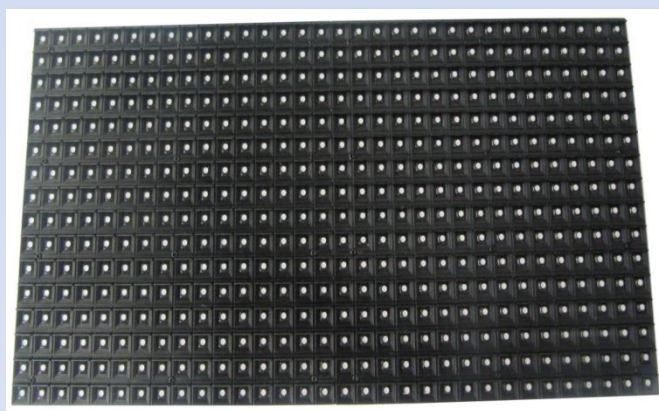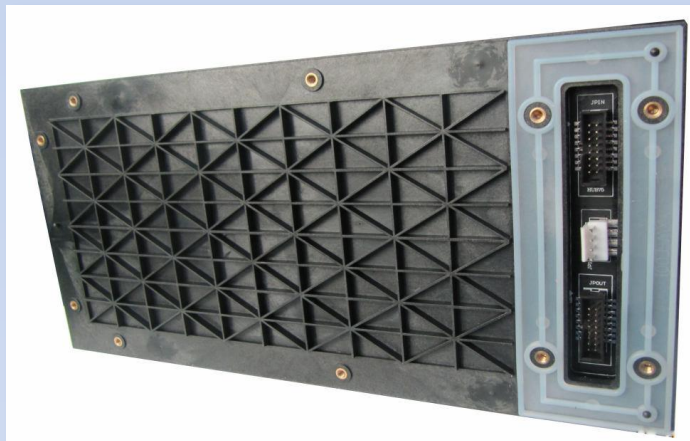

Structure description—cabinet appearance



P8 SMD 3 in 1 outdoor specification

Pixel pitch 8mm
Size of cabinet 640mm(w)*640mm(h)
Pixel of cabinet 80*80
Weight of cabinet 10KGS
Size of module 320mm(w)*160mm(h)
Resolution of module 40*20
Density 15625dot/m²
Best viewing distance >8M
Best viewing angle 120°
Max power consumption <680w/m²
Colors 16777216
Gray scale 13bits
Color temperature 6500k
Control method Synchronization
Driving device Constant current
Driving method 1/5 scanning
Frame frequency >60Hz
Refresh frequency 900HZ~4300HZ
Brightness 4700~5500cd/M²
Working voltage AC220v/110v ±10%
Working temperature -20 ~50°C±10%
I P grade IP65
MTBF 10000hours
Life span 100000hours